




610 S. Maumee St. Tecumseh, MI 49286 | Ph: 517-424-0577

CUSTOM

Universal Straight Column Shift

(Standard measurements are shown)

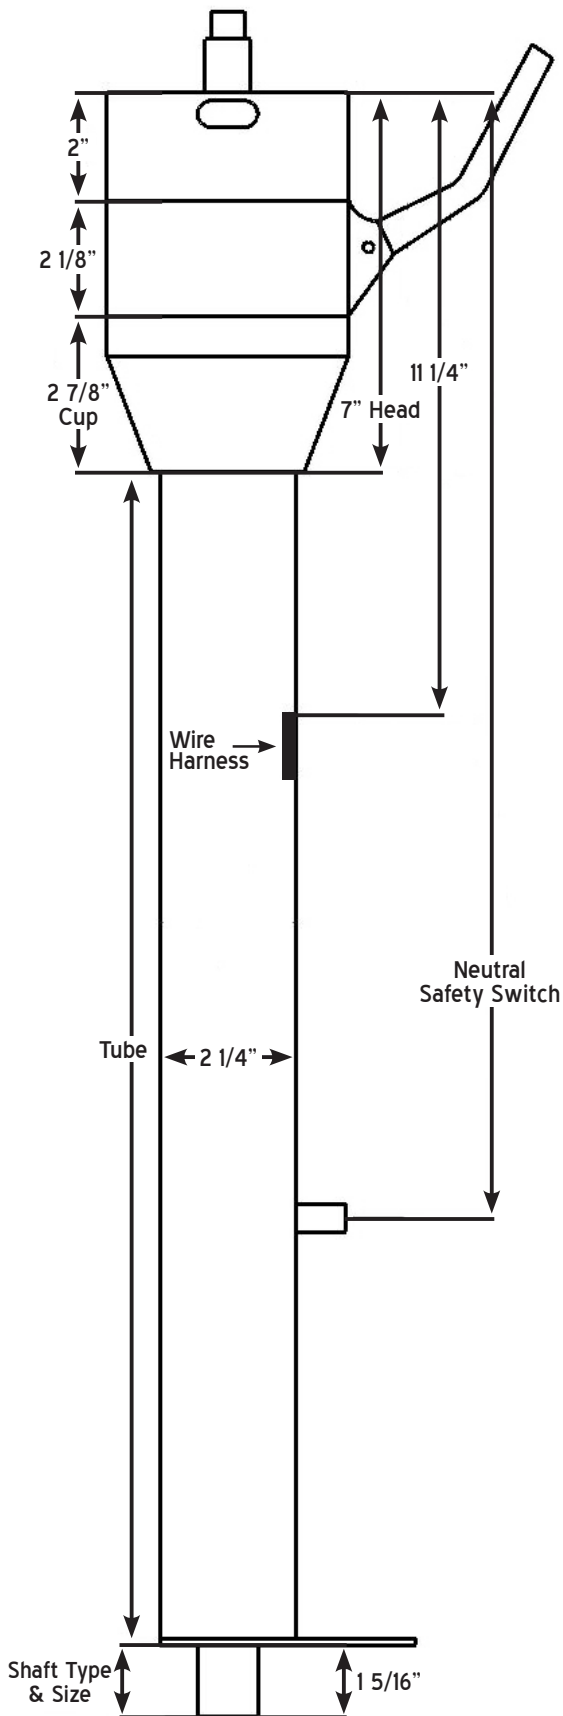

To customize your column, please download this form & fill in the fields below. Mark the column drawing if necessary, add any additional comments and sign. Once you are satisfied, save the filled out form and email it to us at sales@ididitinc.com. Directions for submitting can be found here: <http://bit.ly/ic00Ep6>

Alternatively, you can also fax it to us at: 517-424-7293

- Reposition Wire Harness: _____ " From Top of Column
Overall wire harness position is measured from top of sleeve to top of wire harness location. Standard is 11 1/4". Max total is 22". Cruise control max is 17"
- Rotation of Wire Harness: _____ : _____ O'clock (per 1/2 hour)
Rotation starts at 12 o'clock from seating position
- Add/Move Neutral Safety Switch: _____ " (up to 2" from bottom of tube)
Neutral Safety Switch is measured from top of sleeve to middle of switch. Switch must be located after wire harness.
- Rotation of Neutral Safety Switch: _____ : _____ O'clock
Rotation starts at 12 o'clock from seating position
- Change Cup Length: _____ " Minimum of 1", Standard is 2 7/8"
Shortened cup lengths may expose internal column wiring
- Tube Diameter (check one): 2" 2 1/4" (Standard)
- Shaft Length: _____ " Out of tube (Max 8")
- Shaft Type (check one): 1"48 3/4"DD 1"DD 3/4"36
"Shorty" columns can ONLY be built using a 3/4" DD output shaft
- Overall Length (from top of head to the bottom of shaft): _____ "
- Column Finish (check one): Paintable Steel Chrome Black
 Brushed Aluminum Polished Aluminum

Vehicle: _____ Year: _____

Additional Comments: _____

Name: _____

Phone: _____ Email: _____

By typing my name below, I agree to recognize this as my legal signature for this document. The information I have supplied is correct and I assume responsibility for the requests that have been made on this form.

Signature: _____

Date: ____/____/____

Sales Order #: _____