




610 S. Maumee St. Tecumseh, MI 49286 | Ph: 517-424-0577

# CUSTOM

## Universal Straight Column

(Standard measurements are shown)

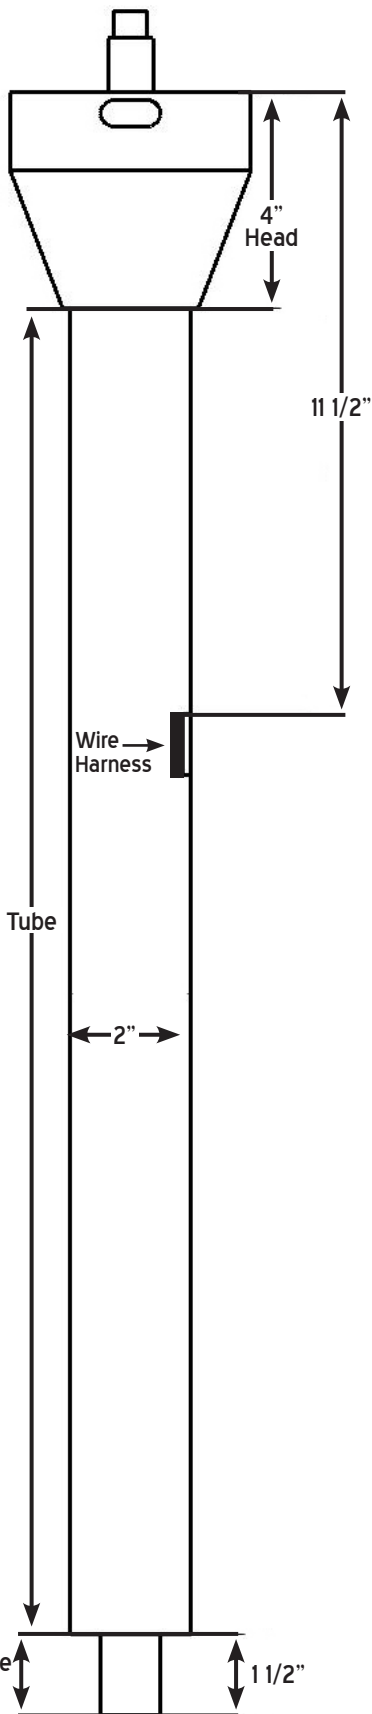

To customize your column, please download this form & fill in the fields below. Mark the column drawing if necessary, add any additional comments and sign.

Once you are satisfied, save the filled out form and email it to us at [sales@ididitinc.com](mailto:sales@ididitinc.com). Directions for submitting can be found here: <http://bit.ly/1cOOEp6>

Alternatively, you can also fax it to us at: 517-424-7293

- Reposition Wire Harness: \_\_\_\_\_ " From Top of Column  
Overall wire harness position is measured from top of sleeve to top of wire harness location. Standard is 11 1/2". Max total is 22". Cruise control max is 17"
- Rotation of Wire Harness: \_\_\_\_\_ : \_\_\_\_\_ O'clock (per 1/2 hour)  
Rotation starts at 12 o'clock from seating position
- Cut/Extend Tube: \_\_\_\_\_ "
- Tube Diameter (check one):  2" (Steel)  1 3/4" (Aluminum)
- Shaft Length: \_\_\_\_\_ " Out of tube (Max 8")
- Shaft Type (check one):  1"48 (standard on aluminum)  3/4"DD  1"DD (standard on steel)  3/4"36  
"Shorty" columns can ONLY be built using a 3/4" DD output shaft
- Overall Length (from top of head to the bottom of shaft): \_\_\_\_\_ "
- Column Finish (check one):  Paintable Steel  Chrome  Black  
 Brushed Aluminum  Polished Aluminum

Vehicle: \_\_\_\_\_ Year: \_\_\_\_\_

Additional Comments: \_\_\_\_\_

Name: \_\_\_\_\_

Phone: \_\_\_\_\_ Email: \_\_\_\_\_

By typing my name below, I agree to recognize this as my legal signature for this document. The information I have supplied is correct and I assume responsibility for the requests that have been made on this form.

Signature: \_\_\_\_\_

Date: \_\_\_\_/\_\_\_\_/\_\_\_\_

Sales Order #: \_\_\_\_\_